


US Industrial Sourcing, L.L.C.

SPECIFICATIONS

Pressure/Temperature Test Port PT Series

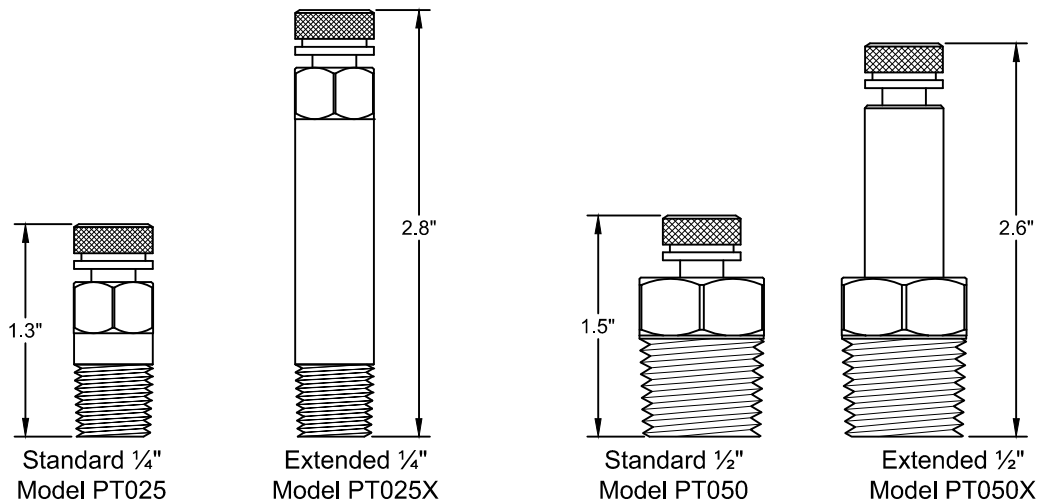

PRODUCT DESCRIPTION: The USIS Model PT is a pressure/temperature test port that allows for quick connection of pressure and temperature measuring instruments for testing, balancing, and troubleshooting hydronic systems. The PT Port's Dual Durometer Core design allows the bottom seal to close and seal the system before the test probe is fully removed. The PT Port is available in 1/4" NPTM and 1/2" NPTM sizes with standard lengths or extended lengths for hard to reach locations where pipe insulation is used .

| STANDARD MATERIAL SPECIFICATIONS | |
|----------------------------------|--------------------------|
| PT Body | Brass ASTM B455-05 |
| Cap | Brass ASTM B455-05 |
| Ring | Brass ASTM B455-05 |
| Cap Gasket | NBR Rubber |
| Core | EPDM Dual Durometer Core |

Note: The specific ASTM standard may vary and should be confirmed at the time of order.

PRODUCT SPECIFICATIONS:

- Maximum working pressure: 1000 PSI
- Maximum working temperature: 300°F
- The dual Durometer core provides maximum sealing protection for low and high pressures
- The standard length PT Port is intended for use where insulation is 1" or less
- The extended length PT Port is intended for use where insulation is 2½" or less

The information presented on this submittal is correct at the time of publication. US Industrial Sourcing, L.L.C. reserves the right to change design, and/or material specifications without notice.